



# 6048 COB LED - MODULO POWER LED

design: U.T. EGOLUCE

Spots

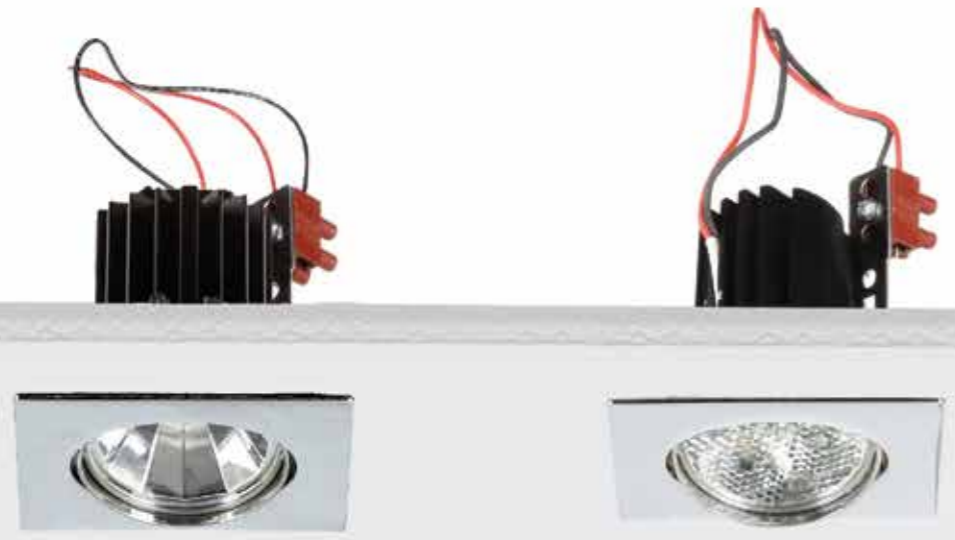

Dischetto reggi lampadina pag 449  
Bulb stopper pg 449

## 6048 + COB LED



0,40 kg



.01 .31 .32


7,5 cm.

Source LED cod.	OPTIC degree		lm	LED color
0107/XW	124 140 160	6,2W 17,8V 350mA	740lm	2700K
0107/WW	124 140 160	6,2W 17,8V 350mA	785lm	3000K
0107/W	124 140 160	6,2W 17,8V 350mA	829lm	4000K
0107/CW	124 140 160	6,2W 17,8V 350mA	850lm	5000K
0108/XW	124 140 160	9,2W 18,4V 500mA	995lm	2700K
0108/WW	124 140 160	9,2W 18,4V 500mA	1056lm	3000K
0108/W	124 140 160	9,2W 18,4V 500mA	1115lm	4000K
0108/CW	124 140 160	9,2W 18,4V 500mA	1160lm	5000K
0108/WW/IP	38	9,2W 18,4V 500mA	1056lm	3000K
0108/W/IP	38	9,2W 18,4V 500mA	1115lm	4000K

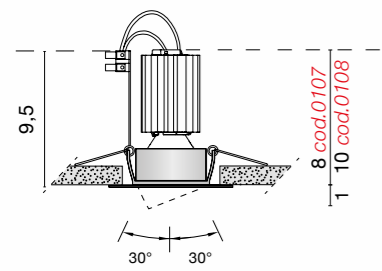

## 6048 + POWER LED



0,40 kg



.01 .31 .32

7,5 cm.

Source LED cod.	OPTIC degree		lm	LED color
0121	25°	3x3W 700mA	846lm	4000K
0123	25°	3x3W 700mA	804lm	3000K



Source LED	Drivers								
	0125 350mA	0126 700mA	0147/COB 500mA	0128 350mA	0129 DIM	0129/DALI DIM DALI	0145 DIM	0145/DALI DIM DALI	0115/EM EMERGENCY
0107	1	NO	NO	1-2	1-2	1-2	1-3	1-3	1
0108	NO	NO	1-2	NO	1-2	1-2	1-3	1-3	1
0121	1-2	1-2	NO	1-3	1-3	1-4	1-6	1-6	NO
0123	1-2	1-2	NO	1-3	1-3	1-4	1-6	1-6	NO

# 6048

design: U.T. EGOLUCE



Spots



## 6048 12V

0,1 kg

12V 50W GU5,3

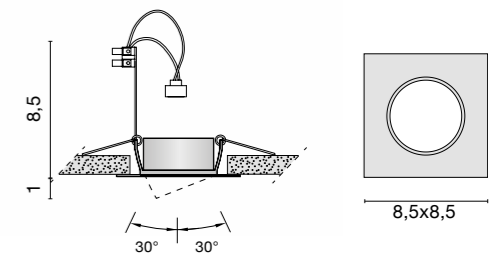

.01 .31 .32

7,5 cm.

# 6056

design: U.T. EGOLUCE

Spots





## 6056 230V

0,15 kg

50W GU10

7W GU10 LED (cod.0104/16)

7W GU10 LED (cod.0094/16)

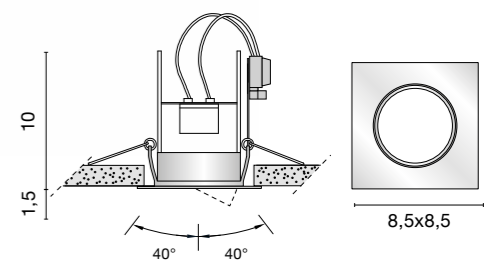

.01 .31 .32

7,5 cm.