



- 1) Button
- 2) Cover
- 3) Frame
- 4) Transparent part
- 5) Base
- 6) Screw of the claw
- 7) Clips
- 8) Potentiometer axle

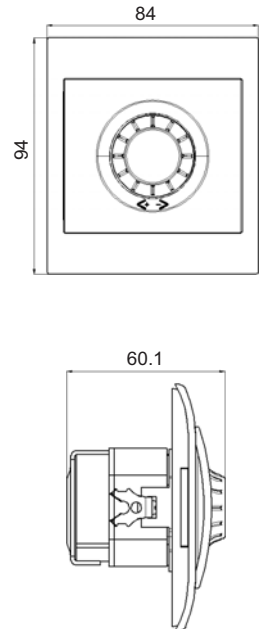

Connection Diagram for 1000 W Dimmer

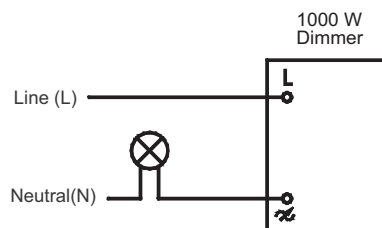

Technical Features:

- Filtered, so it does not interfere with radio waves (with Toroid coil).
- Rotating ON / OFF system and light intensity adjustment feature
- Fuse (5A).
- 220V~, 50-60Hz.
- Min.60 Watt - Max.500 Watt for incandescent lamps and halogen lamps with tube - shaped bulbs.
- Min.100 Watt - Max.400 Watt for low - voltage white coil lamps that operate via transformers with iron core coils.

Assembly:

Depth of mounting box shall be min. 45 mm

1- The cable connections should be done as shown in the connection diagram.

2- Place the base (5) in the mounting box and tighten the screws on the clips (6) with an appropriate screwdriver.

3- Transparent parts (4) should be put in the slot on the side of frame.

4- Place the frame set (3) on top of the dimmer and push the cover (2) aligning it with the clips (7) on the base .

5- Button (1) should be put according to the direction of the "D" profile of the potentiometer axle (8).

Operation Principles and Properties:

- It can be connected to a Veavien switch that can control one more lamps from two separate points and the required lighting level can be achieved.
- It is turned on and off by pressing the push button. The lighting level can be adjusted by rotating the button clockwise or anti - clockwise.
- Do not use the dimmer outside the recommended values.